

# SIGNAGE - LED INDICATOR



## Characteristics

- Displays lighted alternate information in two separate compartments such as IN / OUT , AVAILABLE / NOT AVAILABLE, PRESENT / ABSENT etc.
- Employs 2 sets of LED's which can be alternately switched ON with the help of a controlling 2 way switch.

## Technical Specification

- Rated Voltage: 240V~
- Power consumption: <0.5W.
- Impact protection: IPK2
- Employs non heat generating, reliable and energy efficient clustered LED's.
- Suitable for mounting on inflammable material
- Class II appliance.

## Special Features


Specially suitable for displaying two contrast information, any of which can be selected by the controlling two way switch.

## Nomenclature and Marking


GM modular range is marked with details using laser technology with absolute precision and indelibility.

Product	Product code	Details
	AA 3 079	LED Indicator

## Installation:

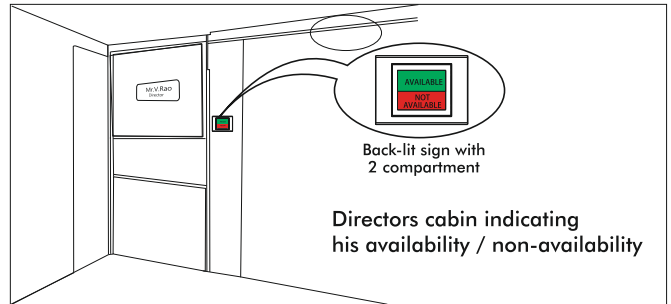

## Wiring diagram

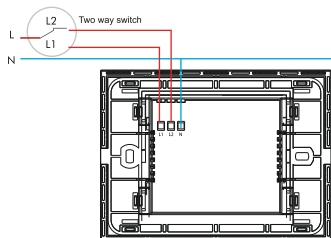

## Front and side view showing the over all dimensions in mm

