(1 module)



## **Functions**


- Connects user equipment to systems for the distribution of analog or digital sound and video signals, from terrestrial, satellite or cable link, in the 5-2400 MHz frequency band.
- Permits the connection of a single device (eg. TVor SAT receiver).
- Can be used for satellite internet applications and also for interactive functions (hotel communications and cable TV)

## **Technical Specifications**


- Frequency range 5-2400 MHZ
- Output through coaxial male connecter.
- Pillar type terminal for connection.
- Screwterminal.

## **Application**

Used to provide TV connections at different locations.

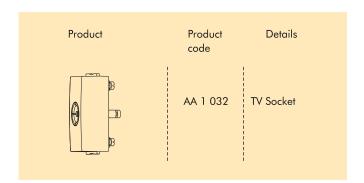

## Example of Use



Front and side view showing the over all dimensions in mm



